



QUICK GS DN60-200 - Anchored version with inserts

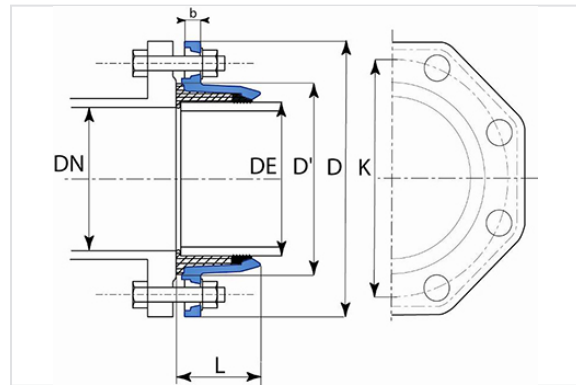

DN flange	Ø DE	L	D	D'	b	K	Mass	References
60/65 mm	77 mm	51 mm	185 mm	110 mm	16 mm	145 mm	1.85 kg	MAA60CBCH
80 mm	98 mm	56 mm	200 mm	134.5 mm	16 mm	160 mm	2.3 kg	MAA80CBCH
100 mm	118 mm	63 mm	220 mm	156 mm	16 mm	180 mm	2.7 kg	MAB10CBCH
125 mm	144 mm	70 mm	250 mm	183 mm	16 mm	210 mm	3.9 kg	MAB12CBCH
150 mm	170 mm	76 mm	285 mm	210 mm	16 mm	240 mm	4.7 kg	MAB15CBCH
200 mm	222 mm	90 mm	340 mm	265 mm	17 mm	295 mm	7.25 kg	MAB20CBCH

Material and coatings

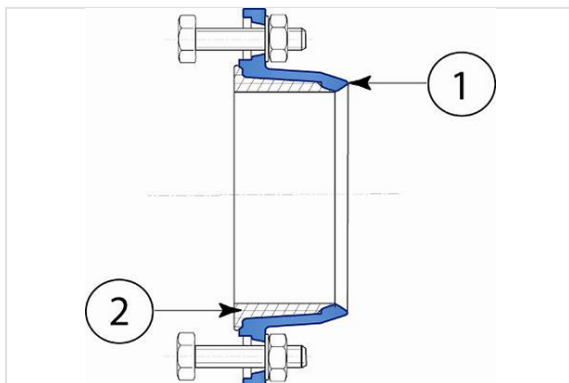

1. Counter-flange: ductile iron coated with blue epoxy powder 250 microns average thickness with a minimum of 200 microns, conforming to EN 14901-1 (PECB)

2. Tightness gasket: EPDM
3. Inserts: Chromium-nickel type stainless steel

The information on this sketch is, to the best of our knowledge correct at the time of printing. However Saint-Gobain are constantly looking at ways of improving their products and services therefore reserve the right to change without prior notice, any of the data shown. Any orders placed will be subject to our Standard Conditions of Sale, available on request.