


Tês 2 Bocas com junta Standard derivação flangeada (flange orientável) DN60-600

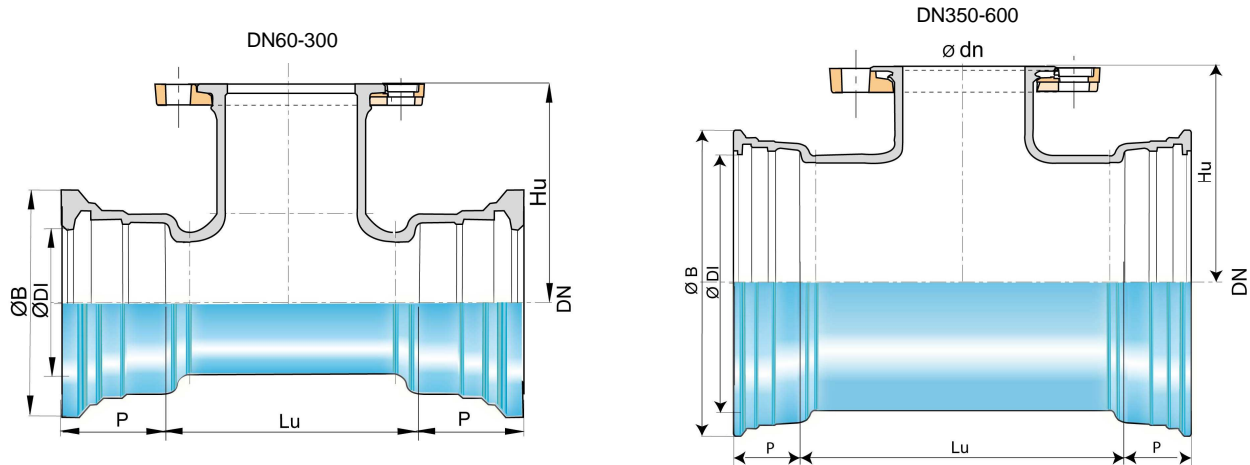

DN	Ø dn	Lu	Hu	P	Ø DI	Ø B	Peso PN10	Peso PN16	Peso PN25	Peso PN40	Referência PN10	Referência PN16	Referência PN25	Referência PN40
mm	mm	mm	mm	mm	mm	mm	kg	kg	kg	kg				
60	40	154	141,0	82,0	80,2	143,5	8,8	8,8	8,8	8,8	NSA60UD1A	NSA60UD1A	NSA60UD1A	NSA60UD1A
60	60	154	161,0	82,0	80,2	143,5	9,7	9,7	9,3	9,3	NSA60UD1C	NSA60UD1C	NSA60UD3C	NSA60UD3C
80	40	145	149,0	85,0	101,4	167,5	10,2	10,2	10,2	10,2	NSA80UD1A	NSA80UD1A	NSA80UD1A	NSA80UD1A
80	60	145	169,0	85,0	101,4	167,5	11,1	11,1	10,7	10,7	NSA80UD1C	NSA80UD1C	NSA80UD3C	NSA80UD3C
80	65	145	174,0	85,0	101,4	167,5	11,5	11,5	-	-	NSA80UD1D	NSA80UD1D	Consulte-nos	Consulte-nos
80	80	183	165,0	85,0	101,4	167,5	12,5	12,5	12,5	12,5	NSA80UD1E	NSA80UD1E	NSA80UD1E	NSA80UD1E
100	40	150	161,0	88,0	121,4	187,5	12,0	12,0	12,0	12,0	NSB10UD1A	NSB10UD1A	NSB10UD1A	NSB10UD1A
100	60	150	181,0	88,0	121,4	187,5	12,9	12,9	12,5	12,5	NSB10UD1C	NSB10UD1C	NSB10UD3C	NSB10UD3C
100	65	150	186,0	88,0	121,4	187,5	13,3	13,3	-	-	NSB10UD1D	NSB10UD1D	Consulte-nos	Consulte-nos
100	80	185	177,0	88,0	121,4	187,5	14,6	14,6	14,6	14,6	NSB10UD1E	NSB10UD1E	NSB10UD1E	NSB10UD1E
100	100	210	180,0	88,0	121,4	187,5	16,4	16,4	17,0	17,0	NSB10UD1F	NSB10UD1F	NSB10UD3F	NSB10UD3F
125	40	150	164,0	91,0	147,4	214,5	14,3	14,3	14,3	14,3	NSB12UD1A	NSB12UD1A	NSB12UD1A	NSB12UD1A
125	60	150	184,0	91,0	147,4	214,5	15,2	15,2	14,8	14,8	NSB12UD1C	NSB12UD1C	NSB12UD3C	NSB12UD3C
125	65	150	189,0	91,0	147,4	214,5	15,6	15,6	15,8	15,8	NSB12UD1D	NSB12UD1D	NSB12UD3D	NSB12UD3D
125	80	165	195,0	91,0	147,4	214,5	16,8	16,8	16,8	16,8	NSB12UD1E	NSB12UD1E	NSB12UD1E	NSB12UD1E
125	100	190	200,0	91,0	147,4	214,5	18,5	18,5	19,0	19,0	NSB12UD1F	NSB12UD1F	NSB12UD3F	NSB12UD3F
125	125	267	200,0	91,0	147,4	214,5	23,0	23,0	23,9	23,9	NSB12UD1G	NSB12UD1G	NSB12UD3G	NSB12UD3G
150	40	154	176,0	94,0	173,4	241,0	17,1	17,1	17,1	17,1	NSB15UD1A	NSB15UD1A	NSB15UD1A	NSB15UD1A
150	60	154	196,0	94,0	173,4	241,0	18,0	18,0	17,6	17,6	NSB15UD1C	NSB15UD1C	NSB15UD3C	NSB15UD3C
150	65	154	201,0	94,0	173,4	241,0	18,5	18,5	18,6	18,6	NSB15UD1D	NSB15UD1D	NSB15UD3D	NSB15UD3D
150	80	165	210,0	94,0	173,4	241,0	19,6	19,6	19,6	19,6	NSB15UD1E	NSB15UD1E	NSB15UD1E	NSB15UD1E
150	100	190	215,0	94,0	173,4	241,0	21,4	21,4	21,9	21,9	NSB15UD1F	NSB15UD1F	NSB15UD3F	NSB15UD3F
150	125	220	210,0	94,0	173,4	241,0	23,8	23,8	24,7	24,7	NSB15UD1G	NSB15UD1G	NSB15UD3G	NSB15UD3G
150	150	305	220,0	94,0	173,4	241,0	29,5	29,5	30,5	30,5	NSB15UD1J	NSB15UD1J	NSB15UD3J	NSB15UD3J
200	40	159	209,5	100,0	225,5	294,0	25,1	25,1	25,1	25,1	NSB20UD1A	NSB20UD1A	NSB20UD1A	NSB20UD1A
200	60	159	229,5	100,0	225,5	294,0	26,0	26,0	25,6	25,6	NSB20UD1C	NSB20UD1C	NSB20UD3C	NSB20UD3C
200	65	159	234,5	100,0	225,5	294,0	26,5	26,5	26,6	26,6	NSB20UD1D	NSB20UD1D	NSB20UD3D	NSB20UD3D
200	80	170	240,0	100,0	225,5	294,0	27,0	27,0	27,0	27,0	NSB20UD1E	NSB20UD1E	NSB20UD1E	NSB20UD1E
200	100	195	245,0	100,0	225,5	294,0	29,1	29,1	29,6	29,6	NSB20UD1F	NSB20UD1F	NSB20UD3F	NSB20UD3F

DN	Ø dn	Lu	Hu	P	Ø DI	Ø B	Peso PN10	Peso PN16	Peso PN25	Peso PN40	Referência PN10	Referência PN16	Referência PN25	Referência PN40
mm	mm	mm	mm	mm	mm	mm	kg	kg	kg	kg				
200	125	220	240,0	100,0	225,5	294,0	31,6	31,6	32,5	32,5	NSB20UD1G	NSB20UD1G	NSB20UD3G	NSB20UD3G
200	150	250	245,0	100,0	225,5	294,0	34,9	34,9	35,9	35,9	NSB20UD1J	NSB20UD1J	NSB20UD3J	NSB20UD3J
200	200	360	260,0	100,0	225,5	294,0	44,7	44,6	47,0	48,8	NSB20UD1K	NSB20UD2K	NSB20UD3K	NSB20UD4K
250	60	164	272,0	105,0	277,3	351,0	38,9	38,9	38,5	38,5	NSB25UD1C	NSB25UD1C	NSB25UD3C	NSB25UD3C
250	65	164	272,0	105,0	277,3	351,0	39,3	39,3	39,4	39,4	NSB25UD1D	NSB25UD1D	NSB25UD3D	NSB25UD3D
250	80	234	250,0	105,0	277,3	351,0	43,6	43,6	43,6	43,6	NSB25UD1E	NSB25UD1E	NSB25UD1E	NSB25UD1E
250	100	234	270,0	105,0	277,3	351,0	43,4	43,4	43,9	43,9	NSB25UV1F	NSB25UV1F	NSB25UV3F	NSB25UV3F
250	150	251	280,0	105,0	277,3	351,0	49,5	49,5	50,5	50,5	NSB25UD1J	NSB25UD1J	NSB25UD3J	NSB25UD3J
250	200	344	290,0	105,0	277,3	351,0	60,3	59,9	61,4	62,1	NSB25UD1K	NSB25UD2K	NSB25UD3K	NSB25UD4K
250	250	404	300,0	105,0	277,3	351,0	69,6	69,1	72,1	-	NSB25UD1L	NSB25UD2L	NSB25UD3L	Consulte-nos
300	60	237	297,0	110,0	329,3	408,3	56,3	56,3	55,9	55,9	NSB30UD1C	NSB30UD1C	NSB30UD3C	NSB30UD3C
300	65	237	297,0	110,0	329,3	408,3	56,7	56,7	-	-	NSB30UD1D	NSB30UD1D	Consulte-nos	Consulte-nos
300	80	237	298,0	110,0	329,3	408,3	57,4	57,4	57,4	57,4	NSB30UD1E	NSB30UD1E	NSB30UD1E	NSB30UD1E
300	100	237	300,0	110,0	329,3	408,3	58,1	58,1	58,6	58,6	NSB30UV1F	NSB30UV1F	NSB30UV3F	NSB30UV3F
300	150	347	310,0	110,0	329,3	408,3	71,2	71,2	72,2	72,2	NSB30UD1J	NSB30UD1J	NSB30UD3J	NSB30UD3J
300	200	347	320,0	110,0	329,3	408,3	75,7	75,4	77,1	77,5	NSB30UD1K	NSB30UD2K	NSB30UD3K	NSB30UD4K
300	250	467	305,0	110,0	329,3	408,3	89,4	89,0	91,9	98,7	NSB30UD1L	NSB30UD2L	NSB30UD3L	NSB30UD4L
300	300	467	340,0	110,0	329,3	408,3	97,9	97,2	100,8	-	NSB30UD1M	NSB30UD2M	NSB30UD3M	Consulte-nos
350	60	148	322,0	110,0	381,4	464,3	63,0	63,0	62,6	-	NSB35UD1C	NSB35UD1C	NSB35UD3C	Consulte-nos
350	80	194	310,0	110,0	381,4	464,3	72,0	72,0	72,0	-	NSB35UD1E	NSB35UD1E	NSB35UD1E	Consulte-nos
350	100	194	330,0	110,0	381,4	464,3	73,0	73,0	73,5	-	NSB35UV1F	NSB35UV1F	NSB35UV2F	Consulte-nos
350	150	314	340,0	110,0	381,4	464,3	87,0	87,0	88,0	-	NSB35UD1J	NSB35UD1J	NSB35UD3J	Consulte-nos
350	200	314	350,0	110,0	381,4	464,3	91,0	90,9	92,4	-	NSB35UD1K	NSB35UD2K	NSB35UD3K	Consulte-nos
350	250	369	360,0	110,0	381,4	464,3	104,0	103,6	106,5	-	NSB35UD1L	NSB35UD2L	NSB35UD3L	Consulte-nos
350	300	485	370,0	110,0	381,4	464,3	120,0	119,3	122,9	-	NSB35UD1M	NSB35UD2M	NSB35UD3M	Consulte-nos
350	350	485	380,0	110,0	381,4	464,3	131,0	131,8	137,9	-	NSB35UD1Y	NSB35UD2Y	NSB35UD3Y	Consulte-nos
400	80	195	340,0	112,0	432,4	515,3	67,0	67,0	67,0	-	NSB40UD1E	NSB40UD1E	NSB40UD1E	Consulte-nos
400	100	195	360,0	112,0	432,4	515,3	84,0	84,0	84,5	-	NSB40UV1F	NSB40UV1F	NSB40UV3F	Consulte-nos
400	150	315	370,0	112,0	432,4	515,3	100,0	100,0	101,0	-	NSB40UD1J	NSB40UD1J	NSB40UD3J	Consulte-nos
400	200	315	380,0	112,0	432,4	515,3	105,0	104,9	106,4	-	NSB40UD1K	NSB40UD2K	NSB40UD3K	Consulte-nos
400	250	429	390,0	112,0	432,4	515,3	125,0	124,6	127,5	-	NSB40UD1L	NSB40UD2L	NSB40UD3L	Consulte-nos
400	300	429	400,0	112,0	432,4	515,3	133,0	133,7	137,3	-	NSB40UD1M	NSB40UD2M	NSB40UD3M	Consulte-nos
400	400	545	420,0	112,0	432,4	515,3	162,0	166,0	175,0	-	NSB40UD1N	NSB40UD2N	NSB40UD3N	Consulte-nos
450	100	315	395,0	115,5	483,5	573,0	89,0	89,0	89,5	-	NSB45UV1F	NSB45UV1F	NSB45UV3F	Consulte-nos
450	150	315	400,0	115,5	483,5	573,0	122,0	122,0	103,0	-	NSB45UD1J	NSB45UD1J	NSB45UD3J	Consulte-nos
450	200	315	410,0	115,5	483,5	573,0	115,0	114,9	116,4	-	NSB45UD1K	NSB45UD2K	NSB45UD3K	Consulte-nos
450	250	600	420,0	115,5	483,5	573,0	129,7	129,3	132,2	-	NSB45UD1L	NSB45UD2L	NSB45UD3L	Consulte-nos
450	300	600	430,0	115,5	483,5	573,0	156,3	155,6	159,2	-	NSB45UD1M	NSB45UD2M	NSB45UD3M	Consulte-nos
450	400	600	450,0	115,5	483,5	573,0	175,0	188,3	188,3	-	NSB45UD1N	NSB45UD2N	NSB45UD3N	Consulte-nos
450	450	600	460,0	115,5	483,5	573,0	172,0	178,4	185,6	-	NSB45UD1P	NSB45UD2P	NSB45UD3P	Consulte-nos
500	100	210	420,0	117,5	535,5	628,0	119,0	119,0	119,5	119,5	NSB50UV1F	NSB50UV1F	NSB50UV3F	NSB50UV4F
500	150	325	430,0	117,5	535,5	628,0	143,0	143,0	144,0	-	NSB50UD1J	NSB50UD1J	NSB50UD3J	Consulte-nos
500	200	325	440,0	117,5	535,5	628,0	147,0	146,9	148,4	-	NSB50UD1K	NSB50UD2K	NSB50UD3K	Consulte-nos
500	250	443	450,0	117,5	535,5	628,0	173,0	172,6	175,5	-	NSB50UD1L	NSB50UD2L	NSB50UD3L	Consulte-nos
500	300	443	460,0	117,5	535,5	628,0	181,0	180,3	183,9	-	NSB50UD1M	NSB50UD2M	NSB50UD3M	Consulte-nos
500	400	555	480,0	117,5	535,5	628,0	215,0	219,0	228,2	-	NSB50UD1N	NSB50UD2N	NSB50UD3N	Consulte-nos
500	500	675	500,0	117,5	535,5	628,0	258,0	271,0	277,0	-	NSB50UD1Q	NSB50UD2Q	NSB50UD3Q	Consulte-nos
600	100	340	475,0	132,5	638,6	737,0	182,0	182,0	183,0	183,0	NSB60UV1F	NSB60UV1F	NSB60UV3F	NSB60UV4F

DN	Ø dn	Lu	Hu	P	Ø DI	Ø B	Peso PN10	Peso PN16	Peso PN25	Peso PN40	Referência PN10	Referência PN16	Referência PN25	Referência PN40
mm	mm	mm	mm	mm	mm	mm	kg	kg	kg	kg				
600	200	335	500,0	132,5	638,6	737,0	192,0	192,0	193,0	195,0	NSB60UV1K	NSB60UV2K	NSB60UV3K	NSB60UV4K
600	300	452	520,0	132,5	638,6	737,0	228,0	228,0	231,0	-	NSB60UD1M	NSB60UD2M	NSB60UD3M	Consulte-nos
600	400	570	540,0	132,5	638,6	737,0	271,0	275,0	284,0	-	NSB60UD1N	NSB60UD2N	NSB60UD3N	Consulte-nos
600	600	800	580,0	132,5	638,6	737,0	373,0	398,0	401,0	-	NSB60UD1R	NSB60UD2R	NSB60UD3R	Consulte-nos

Campo de aplicação:

- Para redes de adução de água potável

Principais características :

- Revestimento exterior-interior: cataforese azul 70 µm (ECB)
- Conformidade com a EN 545:2010 e ISO 2531:2009